



medical **ECONET**
GERMANY



mex+40
mex+60


High performance compact portable X-ray

- Universal units for radiography application
- Light weight and compact size
- Exclusive remote control functions by hand switch
- Equipped with dual laser beam
- Flat touch panel, digital display, LED display reverse
- 8 pre-set technique slots (PROM memory)

Specifications

| Model | meX+40 | meX+60 |
|--|----------------------------|----------------------------|
| Output | | |
| Tube Vol./Current | 100 kV/35 mA | 100 kV/60 mA |
| Voltage range | 40-100 kV in 1 kV steps | 40-100 kV in 1 kV steps |
| mAs Range | 0.4 mAs - 100 mAs 25 steps | 0.4 mAs - 100 mAs 25 steps |
| Max. output | 2.4 kW at 80 kV | 3.2 kW at 80 kV |
| X-ray Tube | | |
| Application | Toshiba D-124 | Toshiba D-205B |
| Focal Spot | 1.2 mm | 2.0 mm |
| HU capacity | 20 kHU | 40 kHU |
| Cooling rate | 250 HU/sec | 378 HU/sec |
| Collimator | | |
| Min. Light field: 5 cm x 5 cm @ 1 m SID | | |
| Max. Light field: 35 cm x 35 cm @ 65 cm SID | | |
| Lamp | LED | LED |
| Auto Timer | 30 sec. | 30 sec. |
| SID scale length | 2 m | 2 m |
| Laser Pointer | Dual Laser | Dual Laser |
| Power | | |
| Input | 110/220 VAC | 220-240 VAC |
| Frequency/phase | 50/60 Hz, single phase | 50/60 Hz, single phase |
| Voltage comp. | ± 10 % | ± 10 % |
| Features | | |
| 7 - segment LED read out reversible, Hand switch remote control function | | |
| PROM Memory | 8 APR | 8 APR |
| Weight | 12,8 kg | 14,6 kg |
| Dimensions | 250 x 195 x 355 mm | 250 x 195 x 355 mm |

Dimensions

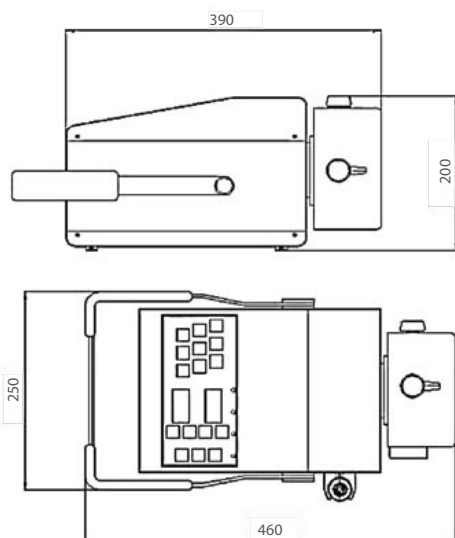

Optional Accessories

PXMS - 1800 Mobile Stand



Standard Accessory

Hand switch



Aluminium Carrying Case



medical **ECONET**

Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0) 208 377 890-0 info@medical-econet.com
 f: +49 (0) 208 377 890-55 www.medical-econet.com
 facebook.com/medicaleconetgermany
 twitter.com/medicaleconet

Distributor

CE 0123

*All specifications are subject to change without notice.